

⊕ C-One SUPERPLUS



**AUTOMATIC
CUT & SEAL CLAMP**



**DEVICE TO ELIMINATE
THE "FILM TAIL"**



**"DON'T GET OFF" SYSTEM
WITH REMOTE CONTROL**



Experience and innovation are the main ingredients of C-One Superplus, the most advanced semiautomatic wrapping machine with turntable.



The machine has directly on the turntable a pneumatic system to cut, seal and hook the film; completed with a "tail" elimination device. The cut is made by a cold blade.

The seal is heat made, but far away from the product. The whole working cycle is completely automated and it can be started via an infrared/radio remote control.

In this way the operator doesn't need to get off the forklift truck, allowing safer and quicker operations.


The reduced turntable height from the ground level makes C-One Superplus suitable to be loaded even by a hand pallet truck.

If you need an automatic machine but your production system or your logistics do not allow you to have a completely automatic line, if you already use an LGV, or if you simply need to improve your production times or the quality of your work, C-One Superplus is the right choice.

Technical Data

- ↕ Height: 2468 mm.
- ↔ Width: 1800 mm.
- ↗ Length: 2880 mm.
- ↑ Turntable height from ground level: 86 mm.
- 📦 Weight: 650 kg.
- 🔌 Power Supply: 220 Vac 1P+N
(other options: 220 Vac 3PH+N o 400 Vac 3PH+N)
- ⚡ Power absorption: 1,00 KW

Product Specifications

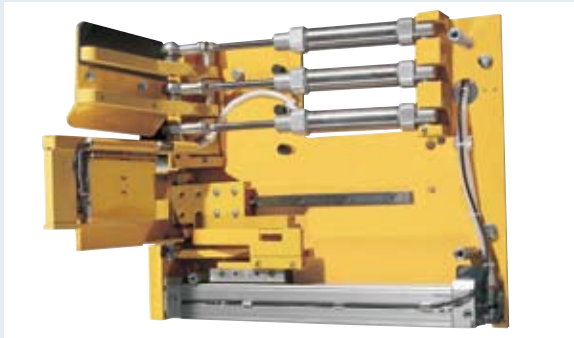

- Automatic cycle for film fixing, sealing and cutting
- Device to eliminate the "film tail"
- Power prestretch
- Machine cycle controlled by electronic board
- Frequency controller to adjust separately the ascent and descent speed of the carriage
- Frequency controller to adjust the turntable speed
- Turntable \varnothing .1650 mm
- Maximum pallet height: 2300 mm
- Maximum pallet dimensions 800x1200 mm
- Maximum pallet weight 2000 kg
- Photocell to detect the height of the pallet
- Safety stop at the bottom of the carriage
- Stop at 0 position
- IP54 control panel
- 3 Password levels
- Adjustable parameters by the control panel without password: cycle selection, number of laps (bottom and top), topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, wrapping height in cm, film tension, initial wrapping height
- 5 Working cycles: ascent/descent; topsheet; only ascent; only descent; layers
- Storage of 32 user programs
- 3 Operating modes: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle beginning and stop
- Auto diagnostic
- Wrapped pallet counter (with password)
- Full configuration possible at 3rd password level
- Infrared/radio remote control receiver
- Powder coating
- Still turntable at the end of the cycle
- 2 Years warranty

Main Options

- Electrical top-press unit for unstable loads
- Wrapping height up to 2.8 mt
- 1800 mm diameter turntable
- Remote Control
- Ramp
- Pit frame
- Black loads photocell
- Weighing system